

Features

- ▶ **Typical wavelength, 655nm**
- ▶ **Stabilized optical power**
- ▶ **Single supply voltage, 5V DC**
- ▶ **Collimated beam**
- ▶ **Low power consumption**
- ▶ **Wire length : 30cm(standard) or custom**
- ▶ **Laser class : 2 (IEC 60825-1:2007)**

Specification

Optical (@RT)

Items	Values	Unit
Optical output power	<1	mW
Peak wavelength	655±5	nm
Focused beam dia. (@FWHM)	<0.2 (@300mm)	mm
Collimated beam dia. (@FWHM)	<3x2(@10M)	mm
Collimated beam div.	<0.5	mrاد
Beam quality	TEM00, M ² <1.5	
Beam intensity pattern	Gaussian	

Electrical (@RT)

Items	Values	Unit
Operating voltage	5±5%	DC V
Operating current	25 (typ.)	mA
Drive circuit	APC	
Operating temp.	-10 ~ +50	°C
Storage Temp	-40 ~ +80	°C
LD Pin Connection	Case ground Case positive	



Mechanical

Items	Values	Unit
Weight	22.0±1	g
Dimensions(mm)	Ø14*60	mm
Housing material	Aluminum	

Description

The MH series laser diode module combines laser diode technology, quality optics and sophisticated electronics within a super slim and light aluminum anodized housing for variety of applications. This series of modules provides a elliptical laser beam in a variety of power and wavelength. Applications include a measurement, positioning, lighting, alignment, guidelines, pointing, switching, leveling and machine vision etc. Useful in a variety of medical, industrial, and scientific instrumentation as well as general R&D work.

Drawings

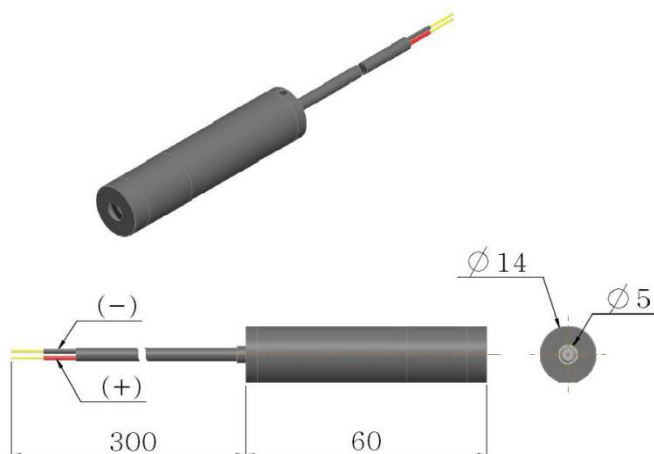

- ◆ **Warranty : One-year**
- ◆ **Accessory : Bracket (Mount) & Power adaptor**

These specifications are subject to change without notice.

Lanics Co., Ltd.
Room #703, 7F Woolim e-Biz Center
170-5, Guro-dong, Guro-gu, Seoul, 152-050, Korea
TEL : +82-2-2108-2255 FAX : +82-2-2108-2260
E-mail : support@lanics.com
[http:// www.lanics.com](http://www.lanics.com)